


Panel | Acoustic  
Purpose 1302




Wish  
1184




Intend  
1185




Hope  
1183



Strive  
1189



Mission  
1190



Ambition  
1186



Idea  
1182




Target  
1188



Direction  
1191




Objective  
1193




Plan  
1181



Desire  
1187



Focus  
1192



Reason  
1194

Panel | Acoustic  
Purpose 1302

Specifications

Content	100% post-consumer recycled biodegradable polyester
Weight	14.1 ± 1.0 oz./lin. yd
Width	67" min. useable
Repeat	None

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- Application testing of this product is recommended.
- Colors may vary between dye lots.
- This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

BIODEGRADABLE CLEAN IMPACT TEXTILES™ address the daunting problem of how to deal with polyester fabric at the end of its useful life.

Biodegradable\* in landfill after 1,278 days (tested under ASTM D5511)

\*Rate and extent of biodegradation into elements found in nature is 91% after 1,278 days under ASTM D5511 (Anaerobic Biodegradation of Plastic Materials Under High Solids Anaerobic Digestion Conditions). The test was done with the same component (PET) polyester and biocatalyst additive. No evidence of further degradation.


Performance

- Colorfastness to light (AATCC 16.3 Option 3)  
Grade 4 min. at 40 hours
- Colorfastness to crocking (AATCC 8)  
Grade 4 min. dry & Grade 3 min. wet
- Breaking Strength (ASTM D5034)  
205 lbf min. warp and 215 lbf min. fill
- Flammability  
ASTM E84 Class I or A

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)

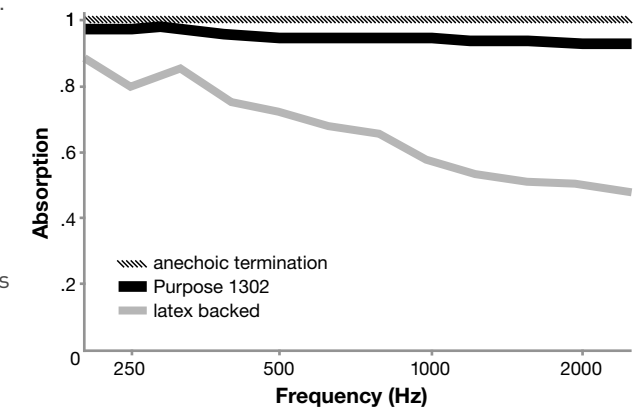

NRC of anechoic termination	1.00
NRC of fabric in front of anechoic termination	.95

This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.