



Phone: 815-314-4177 • Fax: 815-364-0242 • Email: atsinfo@atsacoustics.com • Site: www.atsacoustics.com

ATS Acoustics Tri-Corner Panels


Sleek and durable construction along with an ingenious mounting system makes ATS Tri-Corner Panels an ideal option for reducing low-mid frequencies that are often to blame for the boominess in a room.

Ideal for recording studios, listening rooms, home theaters, houses of worship, or anywhere high quality, affordable acoustic treatment is needed.

Available in 24", 18", and 12" sizes.

Key Features:

- Highly effective as a broadband absorber
- Frameless lightweight construction features a 6-7lb density fiberglass core
- Virtually invisible mounting system using magnets and washers make them easy to install or relocate
- Flush mounts seamlessly adding to the rooms aesthetics
- ASTM E84 Class A fire rating
- Available in a wide range of fabric colors or custom specified fabrics

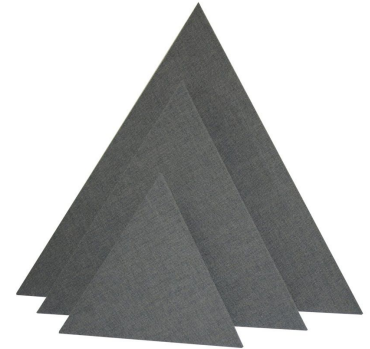

Easy-to-Install, Durable Design

- Hardened edges and corners ensure excellent impact resistance
- Mounting takes just mere minutes with our pre-installed magnets system

1/3 Octave Band Center Frequencies, Hz						
125	250	500	1000	2000	4000	NRC
0.41	0.90	1.18	1.09	1.07	1.08	1.05
Data from independent testing of this item by RAL, a leading acoustical laboratory.						